

技术参数 **SPECIFICATIONS**

间距 (Pitch): 1.25

极数 (Poles): 3~40

额定电压 (Voltage rating): 50V DC/AC

额定电流 (Current rating): 0.5A DC/AC

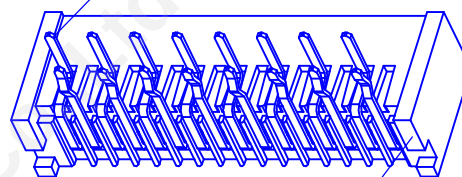
耐压值 (Withstand Voltage): 500VAC/m

工作温度 (Working Temperature):

-25℃~+85℃

绝缘电阻 (Insulation Resistance): $\geq 500M\Omega$ 接触电阻 (Contact resistance): $\leq 30m\Omega$

NO.1 端子Contact



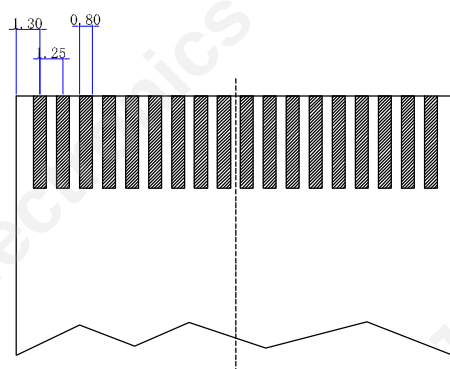

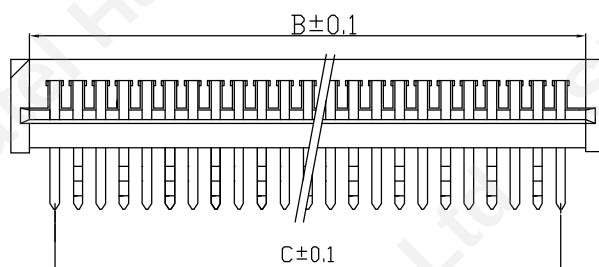

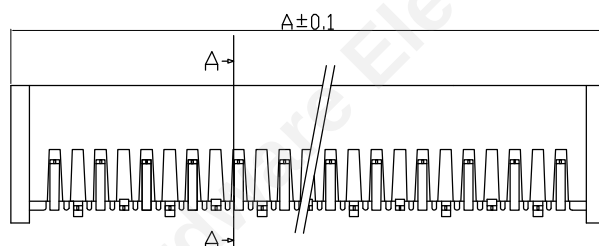
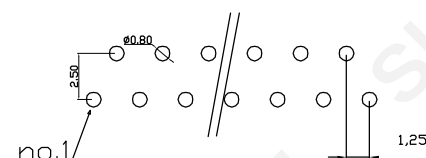
底座Housing

材料 **Material**接触件 (Contact): 磷青铜 镀亮锡 $t=0.25mm$ Phosphor Bronze

Tin-plated

塑胶主体 (Housing): 耐热树脂 (UL94V-0) Heat resistance plastic

(UL94V-0)

适用电缆(proper cable)
($\delta=0.3\pm 0.02mm$)

PCB LAYOUT

规格尺寸			
孔位	A	B	C
3P	7.30	5.10	2.50
4P	8.55	6.35	3.75
5P	9.80	7.60	5.00
6P	11.05	8.85	6.25
7P	12.30	10.10	7.50
8P	13.55	11.35	8.75
9P	14.80	12.60	10.00
10P	16.05	13.85	11.25
11P	17.30	15.10	12.50
12P	18.55	16.35	13.75
13P	19.80	17.60	15.00
14P	21.05	18.85	16.25
15P	22.30	20.10	17.50
16P	23.55	21.35	18.75
17P	24.80	22.60	20.00
18P	26.05	23.85	21.25
19P	27.30	25.10	22.50
20P	28.55	26.35	23.75
21P	29.80	27.60	25.00
22P	31.05	28.85	26.25
23P	32.30	30.10	27.50
24P	33.55	31.35	28.75
25P	34.80	32.60	30.00
26P	36.05	33.85	31.25
27P	37.30	35.10	32.50
28P	38.55	36.35	33.75
29P	39.80	37.60	35.00
30P	41.05	38.85	36.25
31P	42.30	40.10	37.50
32P	43.55	41.35	38.75
33P	44.80	42.60	40.00
34P	46.05	43.85	41.25
35P	47.30	45.10	42.50
36P	48.55	46.35	43.75
37P	49.80	47.60	45.00
38P	51.05	48.85	46.25
39P	52.30	50.10	47.50
40P	53.55	51.35	48.75

产品名称	FPC/FPC连接器	文件编号	JS-CP-057	页次	1/1	绘制比例	1: 1	Shenzhen Jiatel Hardware Electronics Co.,Ltd			
产品型号	1.25-1-nPW	文件版本	B/0	单位	mm	图样标记					
文件版本	更新标记	更新内容			经办/日期	批准/日期	.X	± 0.20	.X*	$\pm 3^\circ$	制作/日期 陶龙阵 2019.03.09
							.XX	± 0.10	.X*	$\pm 2^\circ$	校对/日期 李育生 2019.03.09
							.XXX	± 0.05	.XX*	$\pm 1^\circ$	审核/日期 陶龙阵 2019.03.11
								线性尺寸		角度尺寸	批准/日期 吴天明 2019.03.11