
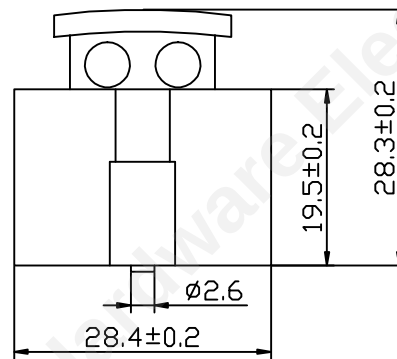
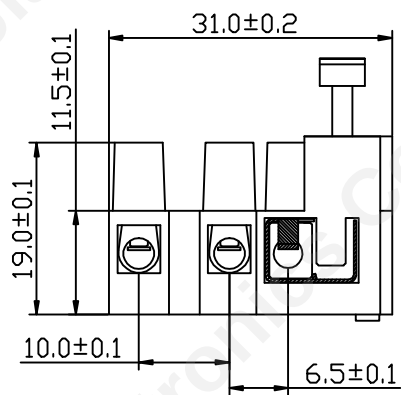


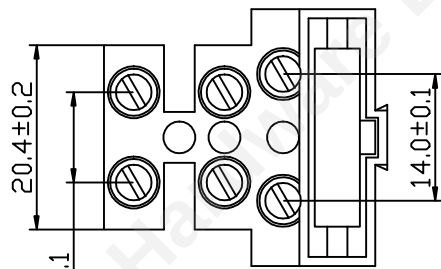

Δ			
Δ			
Δ			

Technical Data:

Material:

- Contact for Fuses: Stainless steel
- Inserts: Brass
- Screw: M3 Steel, zinc plated, yellow chromed or Nickel plated or Tin plated (standard) (option)
- Wire Protectors: Stainless steel
- Moulding: Polyamide 66 (PA66), black handle

Electrical

- Voltage rating: 450VAC
- Current rating: 10Amps/way max
- Wire range: 14-22AWG

Mechanical:

Torque: 4kg-cm/M3.0

Shenzhen Jiatel Hardware Electronics Co., Ltd

PART. NAME: 510-3P (有弹片)				TITLE:		
PART. NO.:				DWG NAME:		
APPROVED BY	CHECKED BY	DESIGNED BY	DRAWN BY	CUSTOM NO.:	Tolerance	
岑杰		廖从报			UNITS:mm	x. ±0.50
					SCALE:1/1	x.x ±0.30
					REVISION:B1	x.xx ±0.10